



INNOVATION. COMMITMENT. EXCELLENCE

# TORIPPOS SERIES

## ITS-815 Powered By: *Poindus*

# SLIM. ELEGANT. POWERFUL!



ITS-815 is designed with the sleek front panel and the compact computing module in the base.

The frameless projected touch panel with its robust glass is ideally suited for hotels, restaurants, stores as well as retail shops.

### Features

- Intel latest Generation Core™ CPU:
- 15" LED backlight LCD panel with PCAP touch screen
- Stylish design with die-casting chassis
- Alternative options of two hard drives or solid state drives with RAID capability
- Efficient thermal ventilation structure
- Upward facing connection points and modularized components advancing serviceability
- Companion peripherals (MSR, iButton, RFID, fingerprint reader, smart card reader and 2nd display)



# Technical Specifications

Model Name		ITS-815	ITS-915	ITS-950P
Main Board	Processor	Intel® Celeron G540 2.5GHz ,Cache 2MB Intel Core i3-3220, 3.3GHz, 3MB Cache	Intel® Core i5-3550S 3.0GHz ,Cache 6MB	Intel® Haswell i5-4570S 2.9GHz, Cache 6MB Intel® Haswell i3-4330 3.5GHz, Cache 4MB Intel® Haswell Celeron G1820 2.7GHz, Cache 2MB
	Chipset	Intel® H61 Express	Intel® Q77 Express	Intel® Lynx Point PCH Q87 (AMT technology )
	System Memory	1 x DDRIII 1600 DIMM, up to 8GB		2 x SO-DIMM DDRIII 1600MHz, up to 16GB
	TPM	N/A	N/A	YES
	LCD Size	15" TFT LCD(LED backlight)		
Display & Touch	Brightness	350nits		
	Resolution	1024 x 768		
	Touch Technology	True Flat Projected Capacitive Technology		
Storage	HDD/SSD	1 x SATA (2.5") HDD or SSD	2 x SATA (2.5") HDD or SSD	
	RAID Function	N/A	RAID 0 / RAID 1	RAID 0 / RAID 1
	DC Input	1 x Mini Din 4P (DC 12V only)		1 x Mini Din 4P (DC 19V only)
	Cash Drawer	1 x RJ-11 (Power Pin 12V)		1 x RJ-11 (12V or 24V(default))
	LAN port	1 x Gigabit Ethernet by RJ-45		
	USB port	4 x USB 2.0	4 x USB 3.0	2 x Power USB_12V, 1 x Power USB_24V 2 x USB 3.0 ; 2 x USB 2.0
I/O & Expansion	COM port	3 x RS-232(COM1:DB-9, COM3:RJ-48) w/ RI/5V/12V Selectable by BIOS (default is RI)		3 x RS-232 w/ RI/5V/12V power , (COM1~COM3 : RJ-48)
	Audio port	1 x Line-out ; 1 x Mic-In		1 x Line-out ; 1 x Mic-In
	VGA port	1 x DB-15 VGA port		1 x DB-15 VGA port, Power enabled by BIOS setting (default disable)
	Bus Expansion	1 x Mini-PCI-E Slot		
	Power Switch	1 x power on / off switch button		
	Speaker	HD Audio, 2W Speaker x 2		
OS Support	Windows 8.1, Windows 7, POSready 7			Windows 10 IOT, Windows 8.1, Windows 7, POSready 7
Power Adapter	External adapter, 120 Watts, +12VDC	External adapter, 180 Watts, +12VDC,15A max.		External adapter, DC Model : 180 Watts, Voltage:+19VDC 9.47 Amax
Compliance	Certifications	CE, FCC, LVD, RoHS, WEEE, REACH		
	Protection	IP 66 on front panel		
VESA Mount	N/A			
Material	Main Unit: Die-Cast Aluminum ; I/O Cover:Plastic			
Color	Main Unit: White / Black			
Dimension(W x H x D )	375 x 322 x 259			
Weight	7.8Kg			
Environmental	Operating Condition	0°C ~ 40°C, 10% ~ 90% RH, non-condensing		
	Storage Condition	-20°C ~ 60°C, 10% ~ 90% RH, non-condensing		



Superior Touch Display



Modularized Service Box




Efficient Thermal Ventilation



Multiple Peripheral Devices

## IO Interface

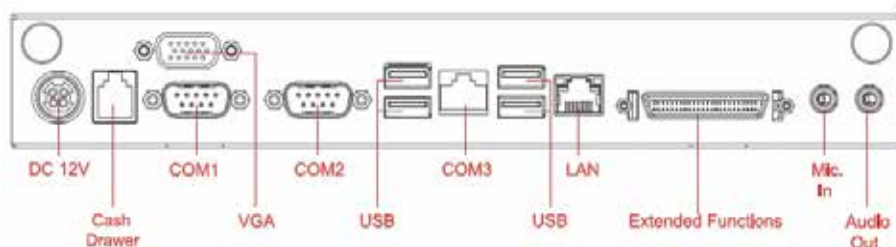

## Dimensions (mm)

